Glass Door Merchandisers

Swing Door Models







___FEATURES / BENEFITS ___

EFFICIENT REFRIGERATION SYSTEM

Turbo Air glass door refrigerators are designed with over-sized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

■ TASTEFUL AND MODERN APPEARANCE

The design of our products is one of our top priorities. Whether you have a restaurant, bar, convenience store or gas station, Turbo Air refrigerators will compliment the appearance of your operation.

Double Pane Glass Doors with Heat Reflecting Film

Equipped with unique double pane glass doors with a layer of patented, transparent thermal insulating film applied between the two glass layers.

Light weight door construction reduces door maintenance and roller wear, and facilitates smooth door.

MAGNETIC DOOR GASKET

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

- ADJUSTABLE, HEAVY DUTY, PE(POLYETHYLENE)
 COATED WIRE SHELVES
- HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure is formed-in-place using high density, CFC free polyurethane insulation.

ERGONOMICALLY DESIGNED DOOR

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

BOTTOM MOUNT COMPRESSOR UNITS

Turbo Air's bottom mount compressor allows easier access for service and extra storage space above. In addition, the lower area provides a cooler and less greasy operating environment which results in reduced compressor running time.

■ REFRIGERATOR HOLDS 33°F ~ 38°F FOR THE BEST IN BEVERAGE PRESERVATION

Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight	LDH
TGM-50RS	2	50	8	1/2	10.9	507	56 x 32 x 79
TGM-72RS	3	72	12	3/4	12.0	706	78 x 32 x 79

TGM-50RS / TGM-72RS SPECIFICATIONS

MODEL	TGM-50RS	TGM-72RS	
Exterior Dimension (LxDxH)	56x32x79	78x32x79	
Interior Dimension(in)	528/9x233/5x612/7	742/5x201/9x613/5	
Compressor (HP)	1/2	3/4	
Voltage (i) NEMA-5-15P	①115V/60Hz	①115V/60Hz	
Amp	10.9 A	12A	
Power Cord Length	6.6 ft.	6.6 ft.	
Plug-In Installation	NEMA 5-15P	NEMA 5-15P	
Net Weight	463lbs	654lbs	
Shelves	8EA	12EA	
Shelf size	251/5x232/5	231/2x232/3	
Bottle Capacity Full	560	840	
Load Line	448	672	

^{*}Design and specifications subject to change without notice.

STANDARD FEATURES

- White color cabinet.
- White color frame on door.
- Double pane glass door with thermal film.
- Fully adjustable wire shelves with non-corrosive coating.

OPTION

- Casters (4" or 5") are available.
- Shelf dividers are available.
- Customized graphics & colors available in quantity













■ WARRANTY: 1 Years Labor and Parts Warranty **Additional 4 Years Warranty on Compressor**


(unit: inch)

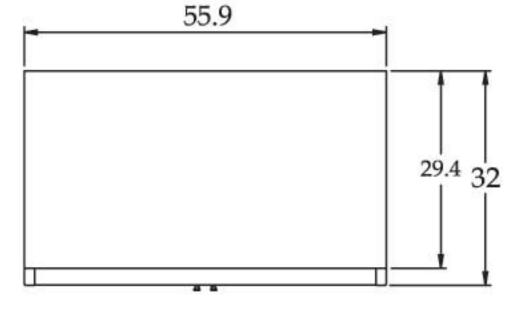


TGM-50RS PLAN VIEW

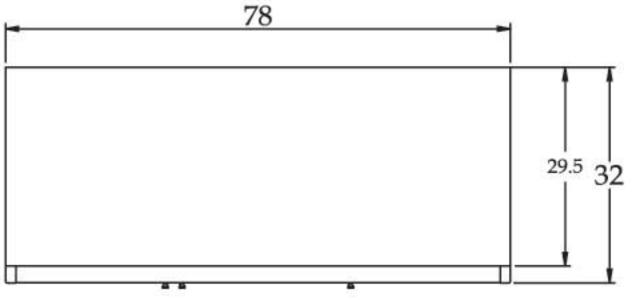

TGM-72RS PLAN VIEW

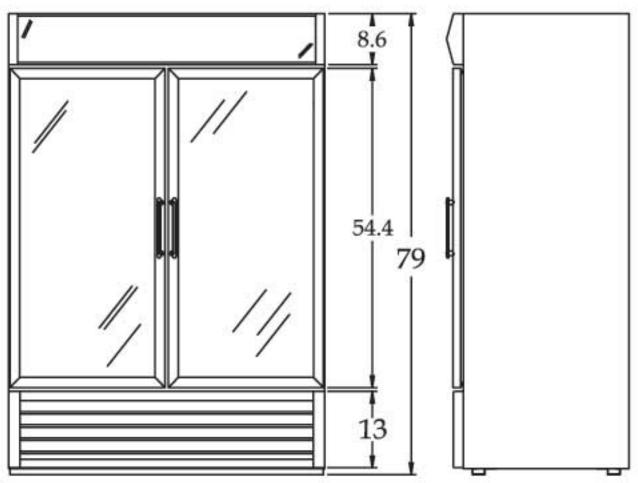

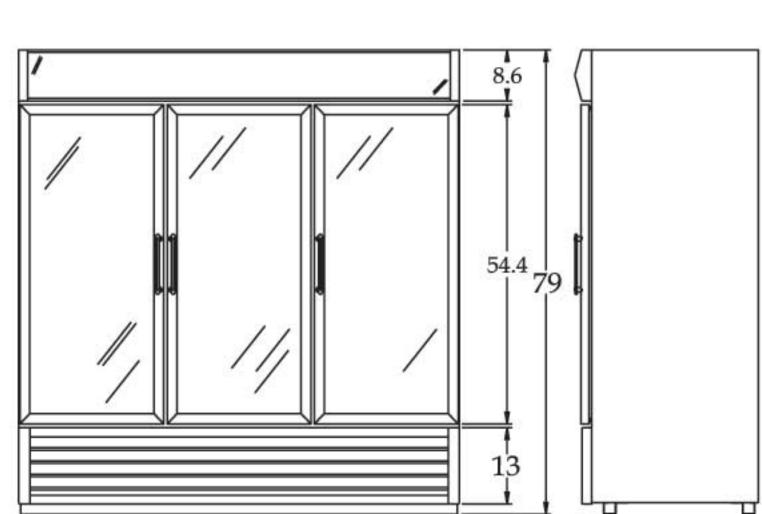

TGM-50RS FRONT VIEW

TGM-72RS FRONT VIEW